

GARLOCK

EQUIPMENT COMPANY

TM

EnforcerTM

- **Maximize Productivity**
- **Reduce Downtime**
- **Minimize Cutting time**
- **Increased Jobsite Safety**




Maximize Productivity: With the Garlock Enforcer Increase roof tear off productivity by up to 300 Percent when compared to single bladed roof cutters, and boost profitability by cutting up to 70 squares per hour.

Reduce Downtime: Change belts on the roof with the quick change belt design. No need to drop the arbor shaft assembly. Simplify maintenance with the access panel and on-board wrench storage.

Minimize Cutting Time: Get the cutting done in half the time and get your crews to work sooner vs. single blade cutters. Cut a 25 inch tearoff width for maximum use of trash chute capacity.

Increased Jobsite Safety: With the enforcer all engine and operating controls within easy reach. Press the foot pedal to start the cut and push down on handlebars to stop cutting. Cut at your pace with the variable speed hydrostatic drive.

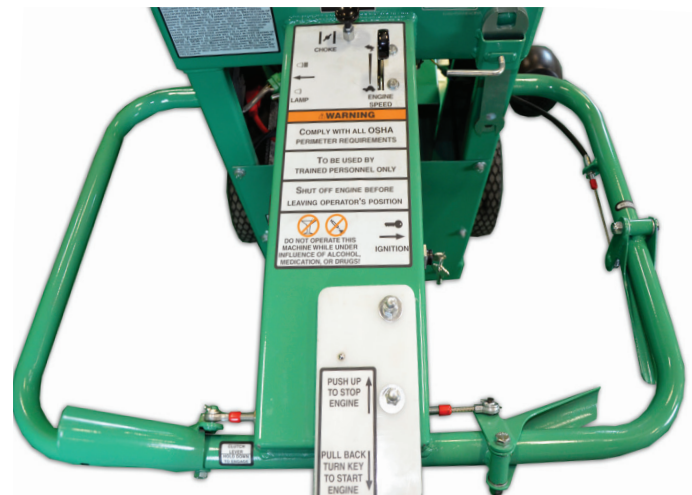

Operator Control Station

www.garlockequip.com

ENFORCER: FEATURES AND OPTIONS



Depress foot pedal to lower saw into cut. Press down on handlebar to raise saw.



Rugged belt drive system with quick access panel.



Tearoff width 25" in one pass.



Standard headlight for extended working hours.



Hour meter for maintaining service intervals.



Extended operation fuel tank.

SPECIFICATIONS

Enforcer Twin Saw

Weight	550 lbs.
Dimensions (LxWxH)	71" x 33" x 40"
HONDA Engine HP	20 hp
Drive System	Hydrostatic transaxle
Blade Guard Design	Dual Floating design
Wheel/ tire design	Dual foam filled
Tearoff cut width	25"

Due to continuous improvement, specifications are subject to change without notice.

Distributed By:



FULL PRODUCT LINE



GARLOCK
EQUIPMENT COMPANY



PLYMOUTH
INDUSTRIES INC. www.garlockequip.com

2601 Niagara Lane North
Plymouth, MN 55447
(800) 328-5914
P: (763) 553-1935
F: (800) 820-3268