


RAM MELTER

- Heat Transfer Oil System
- Safe Diesel Heat
- Digital Temperature Control
- 3 Models to Choose From

The Rubberized Asphalt Melter sets the industry-standard for efficiency and safety in the melting of heat-sensitive membrane and rubberized asphalt materials. Garlock delivers the highest degree of quality construction, productivity, and innovation available today. Get the job done quickly and correctly.

Signature Heat Transfer Oil System - The unique oil-jacketed heat transfer oil system is the key to even safe heating of today's membranes and rubberized asphalt materials. With no flues to replace, the RAM designed to give you years of trouble-free operation. The auger/agitator provides both sweeping and lifting actions to maintain uniform material temperature throughout the tank.

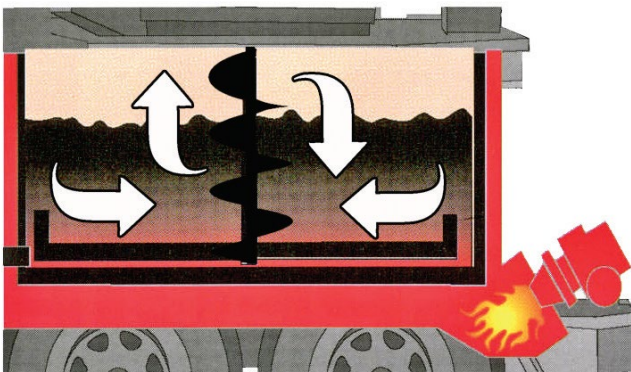


RAM 150 Model

Safe Diesel Heat - All RAM are diesel-powered and heated, eliminating propane hazards on the job site. The fully enclosed burner chamber provides maximum safety and security. The efficient diesel burner brings the material to operating temperature, typically in 45 minutes or less.

Digital Temperature Control - standard on all RAM melters. The system monitors both the oil and material temperatures to ensure optimum control of today's sensitive membranes. One main control panel contains all operating functions. The green status LED's indicate when to turn on the agitator and when the material has reached a safe application temperature.

STANDARD FEATURES

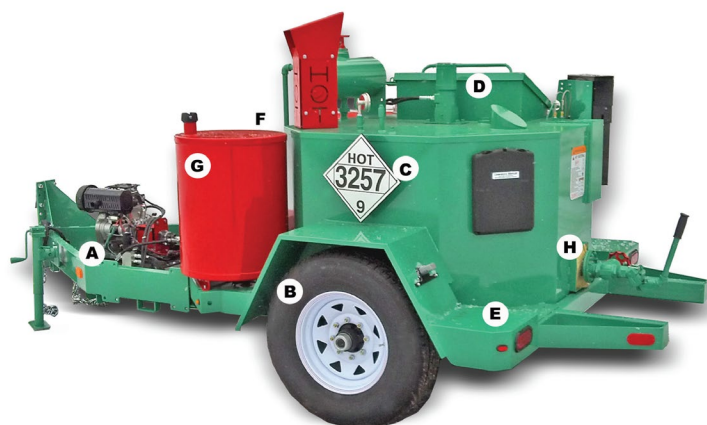

- A. 6 HP Diesel Engine
- B. Torsion Axles with Electric Brakes
- C. No Flue Design
- D. Easy Access Components
- E. LED Taillights
- F. EZ-Read Fuel/ Hydraulic Gauges
- G. 33 Gallon Fuel and Diesel Capacity
- H. Gravity Spigot



RAM 60 Model



Control Panel



RAM 60 Model



RAM 230 with Optional Engine Cover

SPECIFICATIONS

	RAM 60	RAM 150	RAM 230
Material Capacity US Gallons (<i>liters</i>)	60 (227)	150 (568)	230 (871)
Heating Method	Diesel	Diesel	Diesel
Diesel Engine (HP)	6	6	6
Fuel Capacity gal. (<i>liters</i>)	12 (45)	33 (125)	33 (125)
Dimensions L x W x H in. (L x W x H mm)	87 x 33 x 72 (2209 x 838 x 1829)	170 x 84 x 92 (4318 x 2134 x 2337)	165 x 87 x 90 (4191 x 2210 x 2286)
Shipping Weight lbs. (<i>kg</i>)	1,589 (720)	4,120 (1,869)	4,120 (1,869)
Warranty	One Year Bumper to Bumper		

Due to continuous improvement, specifications are subject to change without notice.



P : 800.328.5914
E : customercareorders@garlockequip.com
GARLOCKEQUIP.COM

Address:
2601 Niagara Ln N.
Plymouth, MN 55447